


x4 M5 Threaded hole
PCD 113.5

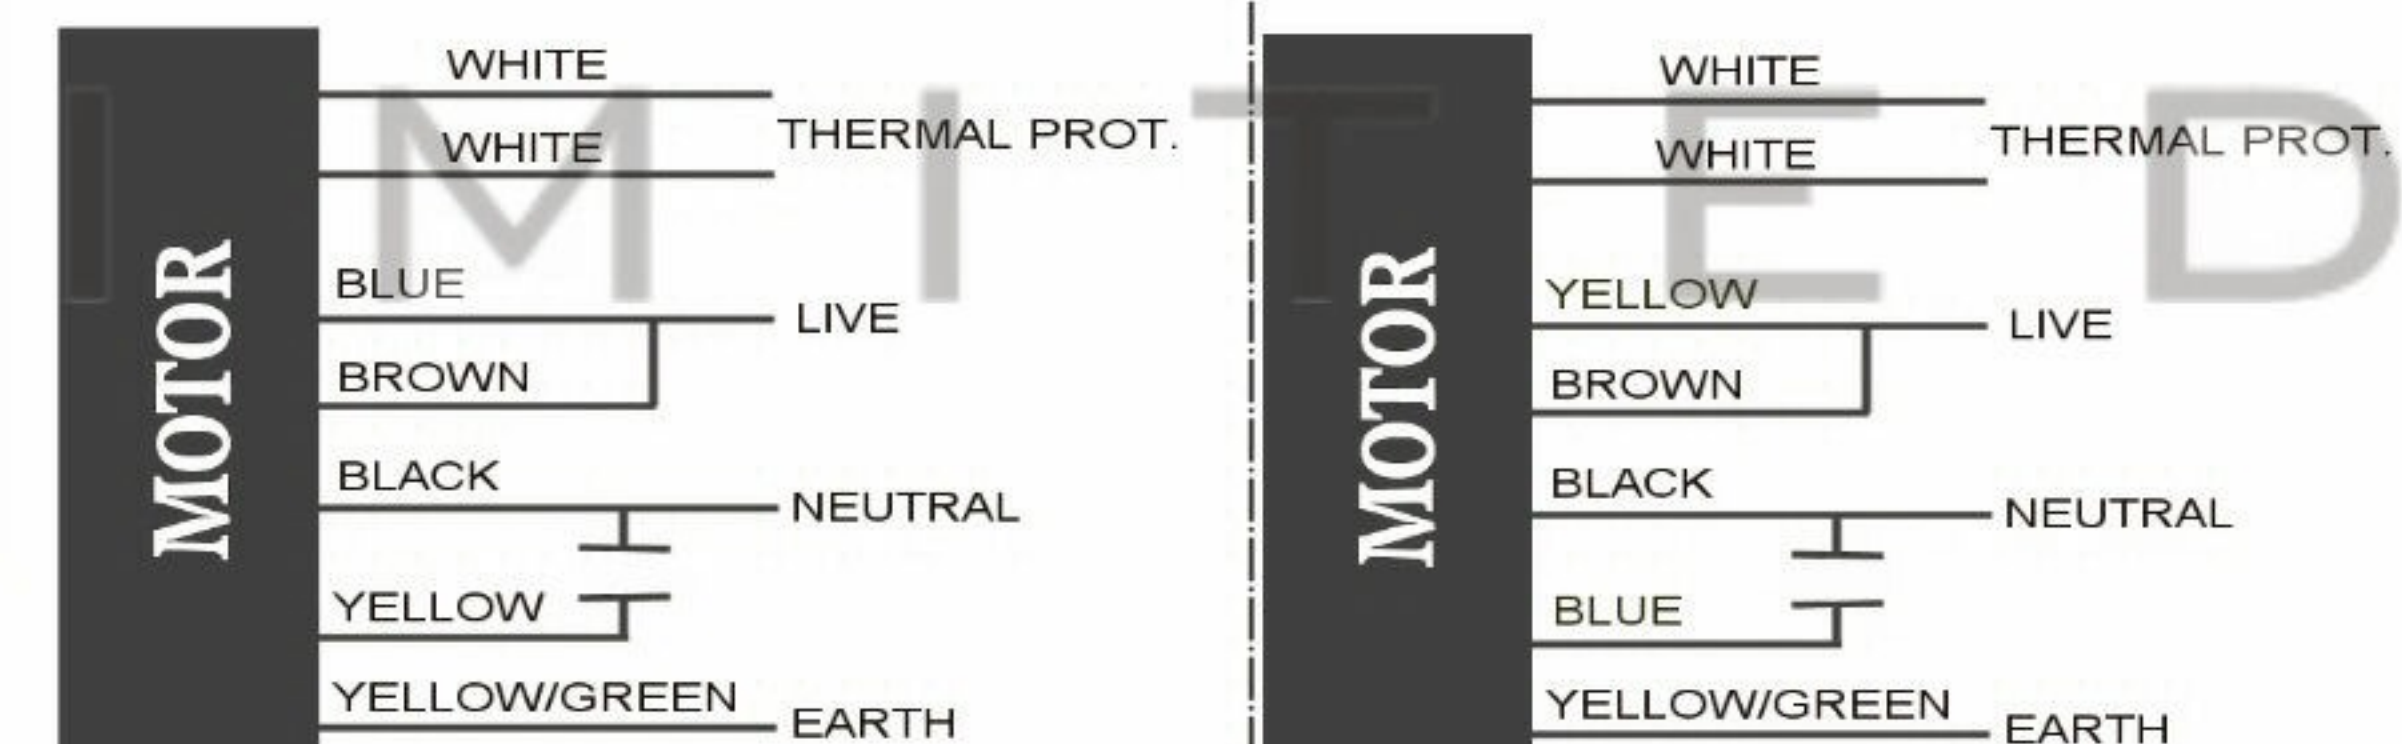

CW ROTATION

ACW ROTATION

TO CHANGE ROTATION INTERCHANGE THE YELLOW & BLUE LEADS

SPECIFICATION					
Motor	PSC	Speed (RPM)	900	Bearings	BALL
Voltage (V)	230/240	Motor Protection	Th. Prot.	Weight (Kg)	7.15
Frequency (Hz)	50/60	Insulation Class	B	Air Volume (M ³ /h)	
Power In/Out (W)	425/250	Protection Class	IP42	Noise Level (dBA)	
Current (A)	2.05	Capacitor (Mf)	10.0	Pressure (Pa)	

POLE STAR
PRODUCTS LIMITED

POLE STAR PRODUCTS LIMITED	
Product Code	120SM250R
Projection Angle	± 3°
Scale:	A4
Sheet:	1 of 1

