



- Plastic Cover



- x2 (22mm x 3.3mm)



- x4 (20mm x 3.3mm)


- x14 Fan Hub



- x2 (Threaded Screw Cover)


- x2 Resilient Mounting Rubbers


- x4 (10mm x 4.83mm)


- x4 (2.8mm Thread x 19mm)


- x4 (2.8mm Thread x 15mm)


- Shaft Adaptor 3.17mm - 5.00mm


- x4 2.91mm x 10mm

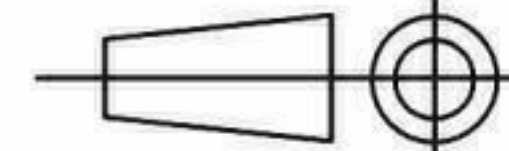

- x4 To Suit Nuts & Threaded Bar Provided





SPECIFICATION					
Motor	SP	Speed (RPM)	3000	Bearings	Sleeve
Voltage (V)	120	Motor Protection	Imp.Prot.	Weight (Kg)	0.6
Frequency (Hz)	60	Insulation Class	B		
Power In/Out (W)	16	Protection Class	IP42	Amb. Temp	
Current (A)	0.45				

**POLE STAR**  
PRODUCTS LIMITED

POLE STAR PRODUCTS LIMITED	
Product Code <b>24TM999</b>	
Projection Angle ± 3°	
	A4 Scale: Sheet: 1 of