
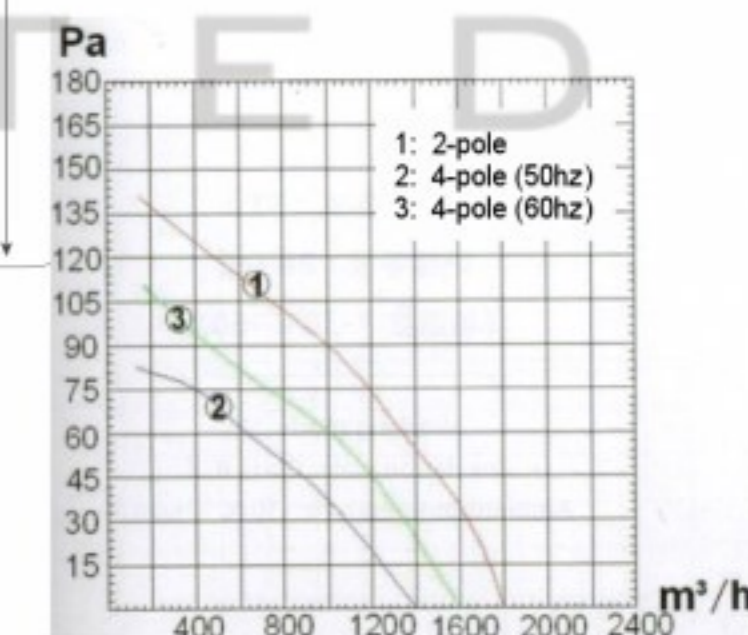


| | | |
|---|----------------------------|-----|
| A | Total Width | 379 |
| B | Fixing point width | 15 |
| C | Slot width | 7 |
| D | Fixing point lug outer PCD | 366 |
| E | Fixing point lug inner PCD | 347 |
| F | Fan blade diameter | 300 |
| G | Basket outer diameter | 333 |
| H | Basket inner diameter | 322 |
| I | Basket depth | 80 |
| J | Junction box protrusion | 35 |
| K | Fan blade/motor protrusion | 35 |
| L | Overall depth | 150 |

All measurements shown are in millimeters
 Measurements shown have manufacturing tolerances of +/- 2mm

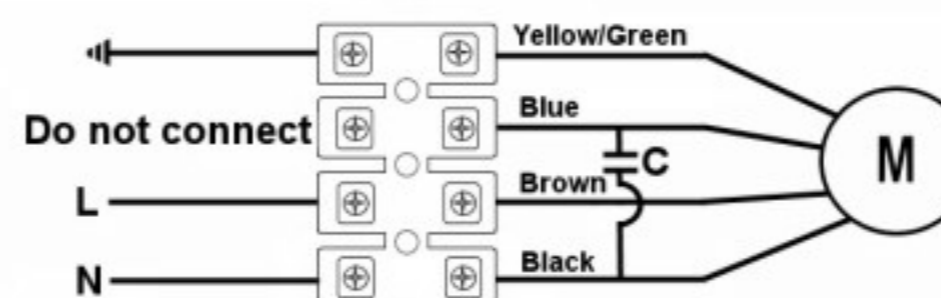

| SPECIFICATION | | | | | |
|------------------|---------|------------------|-----------|-------------------|------|
| Motor | PSC | Speed (RPM) | 2650 | Bearings | Ball |
| Voltage (V) | 220/240 | Motor Protection | Th. Prot. | Weight (Kg) | 3.3 |
| Frequency (Hz) | 50/60 | Insulation Class | F | Air Volume (M³/h) | 1800 |
| Power In/Out (W) | 140 | Protection Class | IP54 | Noise Level (dBA) | 60 |
| Current (A) | 0.65 | Temp. Range | -30 +60 | Capacitor (MF) | 6.0 |

POLE STAR
 PRODUCTS LIMITED

| | |
|----------------------------|---------------------|
| POLE STAR PRODUCTS LIMITED | |
| Product Code | GMA1-300B2-1 |
| Projection Angle | ± 3° |
| Scale: | A4 |
| Sheet: | 1 of 1 |