


A	Total Width	777
B	Fixing point width	26
C	Slot width	12
D	Fixing point lug outer PCD	755
E	Fixing point lug inner PCD	681
F	Fan blade diameter	629
G	Basket outer diameter	676
H	Basket inner diameter	652
I	Basket depth	100
J	Junction box protrusion	40
K	Fan blade/motor protrusion	100
L	Overall depth	230

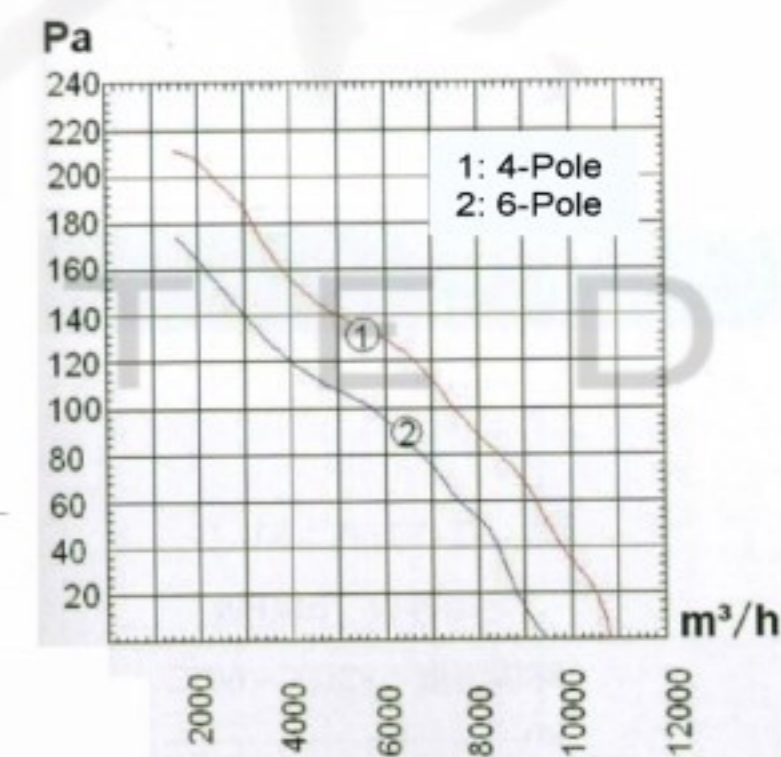

All measurements shown are in millimeters  
 Measurements shown have manufacturing tolerances of +/- 2mm

SPECIFICATION					
Motor	PSC	Speed (RPM)	1360	Bearings	Ball
Voltage (V)	220/240	Motor Protection	Th. Prot.	Weight (Kg)	15.4
Frequency (Hz)	50/60	Insulation Class	F	Air Volume (M³/h)	10800
Power In/Out (W)	750	Protection Class	IP54	Noise Level (dBA)	78
Current (A)	3.5	Temp. Range	-30 +60	Capacitor (MF)	16.0

**POLE STAR**  
 PRODUCTS LIMITED

POLE STAR PRODUCTS LIMITED	
Product Code	<b>GMA1-630S4-1</b>
Projection	A4
Angle	Scale:
± 3°	Sheet: 1 of