


| | N | Pw | I | Lwa |
|-----|-------|------|------|---------|
| | [RPM] | [Pw] | [A] | [Db(A)] |
| (1) | 1390 | 0,46 | 2,16 | 64,1 |
| (2) | 1382 | 0,49 | 2,29 | 64,5 |
| (3) | 1386 | 0,48 | 2,25 | 66,5 |

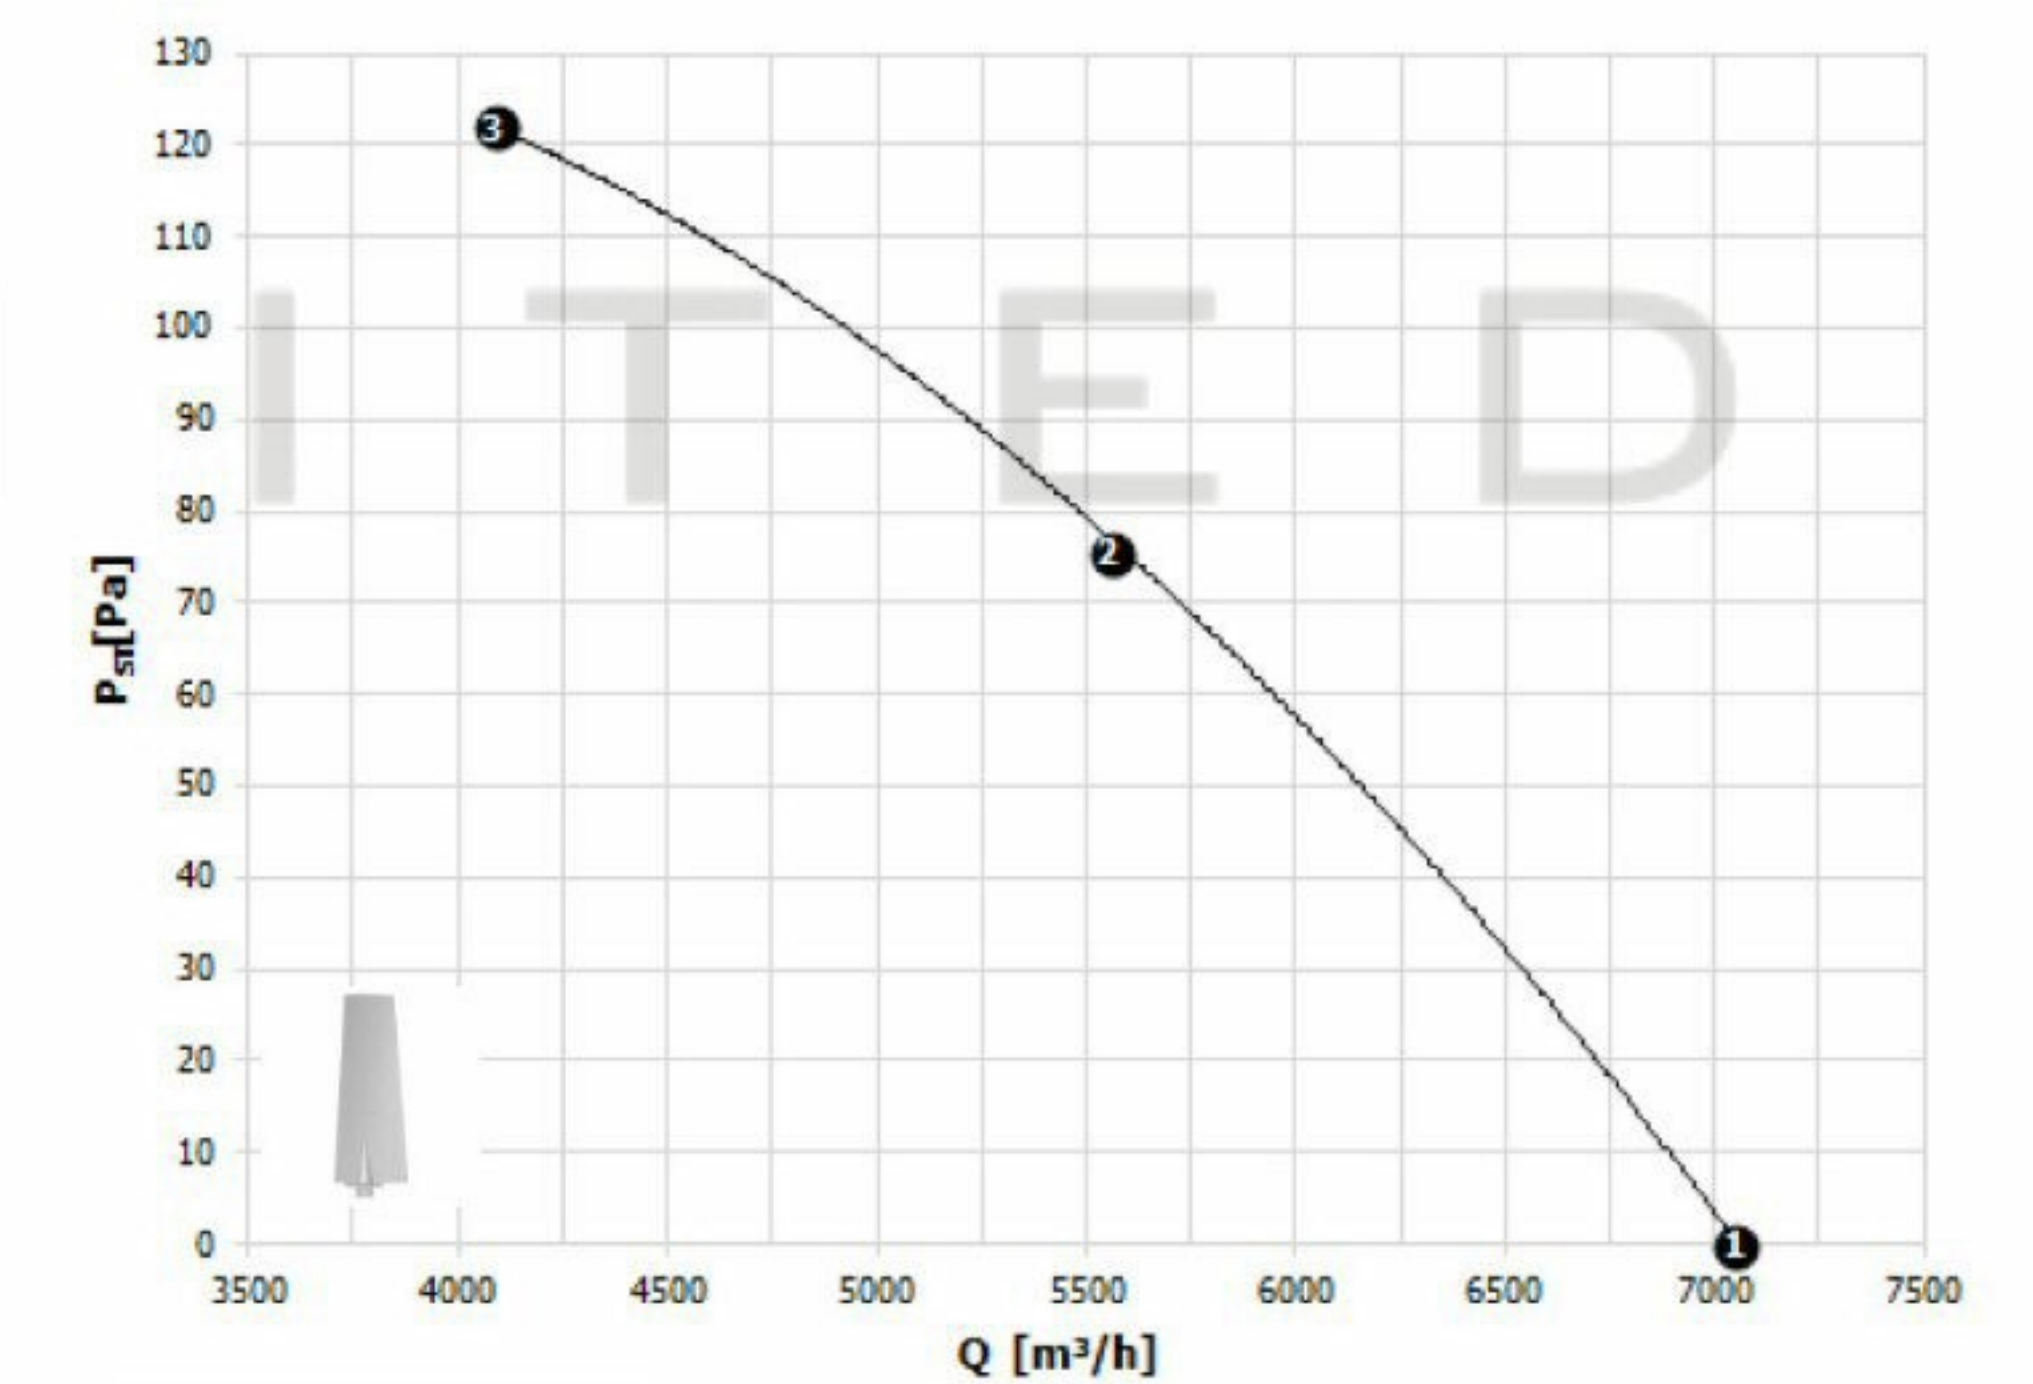

| SPECIFICATION | | | | | |
|------------------|----------|------------------|---------|--------------|------------|
| Motor | Perm.Cap | Speed (RPM) | 1382 | Bearings | Ball |
| Voltage (V) | 1~230 | Motor Protection | Th.Prot | Weight (Kg) | |
| Frequency (Hz) | 50 | Insulation Class | F | Max.Pa | 122 |
| Power In/Out (W) | 0,49 | Protection Class | IP55 | Motor Frame | 71 |
| Current (A) | 2,80 | Capacitor (MF) | 16 | Ambient Temp | -20° + 40° |

POLE STAR
PRODUCTS LIMITED

| | |
|--------------------------------------|-----------------------------|
| POLE STAR PRODUCTS LIMITED | |
| Product Code CAHD1-450B4-1 | |
| Projection Angle ± 3° | |
| | A4 Scale: Sheet: 1 of |