


SAFETY INSTRUCTION
ELECTRONICALLY PROTECTED
by blocked rotor software
Reset procedure:
1) Cut the power OFF; 2) Wait 15 sec.; 3) Turn the power back ON

Pole Star Products Ltd.
ECFM-H20
220/240V 50/60Hz 1300rpm
Max. 30W 220mA CL.B Date

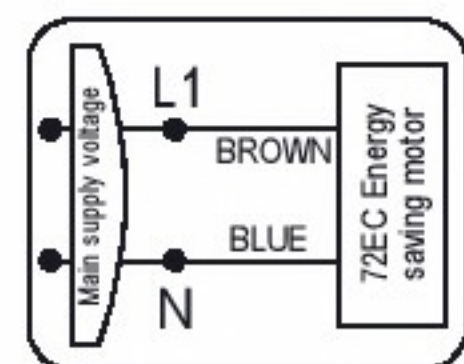

SPECIFICATION					
Motor	EC	Speed (RPM)	1300	Bearings	Ball
Voltage (V)	220/240	Motor Protection	IP65	Weight (Kg)	
Frequency (Hz)	50/60	Insulation Class	H	Noise dB(A)	
Max. Power (W)	30	Protection Class	B		
Max. Amps	220mA	Amb. Temp. Range	-40°C/+50°C		

POLE STAR
PRODUCTS LIMITED

POLE STAR PRODUCTS LIMITED	
Product Code	ECFM-H20
Projection Angle	$\pm 3^\circ$
Scale:	A4
Sheet:	1 of 1